

DID YOU KNOW?

about our...



**NEW
PRODUCT**

Flat Plate Fitting One Hole

FLAT PLATE FITTING ONE HOLE HOT DIP GALVANISED / HEC / MILD STEEL

Part	QFind	Diameter	Width	Inner Diameter	Thickness
		Ø	W (mm)	ID (mm)	T (mm)
GFPMSG1063	H1063	M10	40	11.5	6
GFPMSG1064	H1064	M12	40	13.5	6






APPLICATIONS

- Cable tray support system
- Designed for use with 40mm channels

FEATURES

- Non-rounded edges

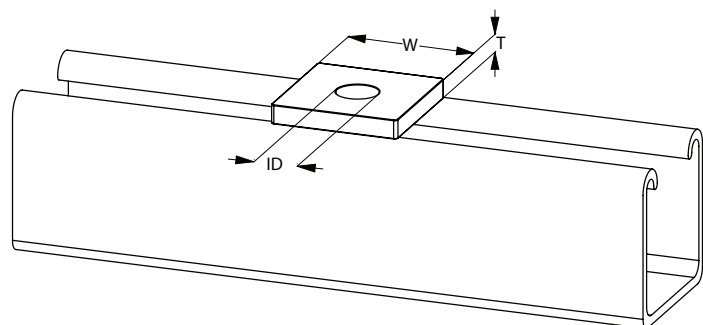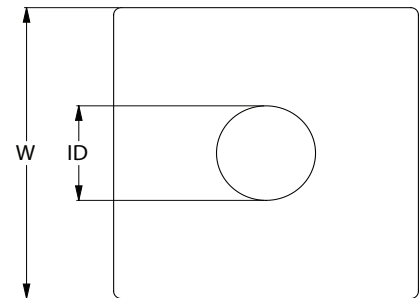

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS** SINCE 1935



231031DYK



Bolt, Screw, Nut, Washer and Anchor Coatings

	Icon/Coating	Standard	Coating Thickness	Corrosion Resistance	Description
HDG	 Hot Dip Galvanised	AS/NZS 1214	50µm	High	HDG products are used where a high level of corrosion resistance is required. HDG products are recommended for long term outdoor applications.
MGAL	 Mechanically Galvanised	ISO 12683	50µm	High	MGAL provides better abrasion resistance than HDG and does not introduce any risk of hydrogen embrittlement. MGAL products provide similar corrosion resistance to HDG.
ZFS	 Zinc Flake Silver	ISO 10683	10µm	High	ZFS provides high corrosion resistance without introducing any risk of hydrogen embrittlement. Thin coating thickness allows external thread to be mated with standard internal thread (no over-tapping).
R1000	 R1000 Hours Protective Coat	Proprietary Coating Specification	20µm	High	Zinc with a ceramic top coat. The ceramic has a high hardness making this coating suitable for products that need significant abrasion resistance.
Z/P	 Zinc Plated (RoHS Compliant)	ISO 4042	5µm	Low	Product is electroplated with zinc which is then passivated with a transparent conversion layer. Z/P products are recommended for indoor and noncorrosive environments.
ZYP	 Zinc Yellow Passivate	ISO 4042	5µm	Low	Product is electroplated with zinc which is then passivated with a iridescent yellow conversion layer. ZYP products have a greater resistance to corrosion than Z/P and are recommended for low-corrosion environments or temporary fixing.
PLN	 Plain (No Coating)	-	-	-	No additional coating applied. Products are supplied lightly oiled to inhibit rust in the packaging and assist with installation.



Self Drilling Screw Coatings

	Icon/Coating	Standard	Coating Thickness	Corrosion Resistance	Description
CL3	 Class 3 	AS/NZS 3566.2	21µm	Moderate	Mechanically galvanised for external use in mild, moderate industrial or marine environments. Corrosivity categories C2 and C3 classified in accordance with ISO 9223.
CL4	 Class 4 	AS/NZS 3566.2	38µm	High	Mechanically galvanised for external use in severe marine environment. Corrosivity category C4 classified in accordance with ISO 9223.
R1000	 R1000 Hours Protective Coat	Proprietary Coating Specification	20µm	High	Zinc with a ceramic top coat. The ceramic has a high hardness making this coating suitable for products that need significant abrasion resistance.
R1500	 R1500 Hours Protective Coat	Proprietary Coating Specification	20µm	High	Zinc with a ceramic top coat. The ceramic has a high hardness making this coating suitable for products that need significant abrasion resistance.
Z/P	 Zinc Plated (RoHS Compliant)	ISO 4042	5µm	Low	Product is electroplated with zinc which is then passivated with a transparent conversion layer. Z/P products are recommended for indoor and noncorrosive environments.
ZYP	 Zinc Yellow Passivate	ISO 4042	5µm	Low	Product is electroplated with zinc which is then passivated with a iridescent yellow conversion layer. ZYP products have a greater resistance to corrosion than Z/P and are recommended for low-corrosion environments or temporary fixing.
TYK	 TYKOTE 	Proprietary Coating Specification	38µm	High	A high performance coating, specially formulated for resisting treated pine chemicals.
Ecoat	 E-Coat Black	ISO 4042 + Proprietary Coating Specification	5µm	Moderate	Electroplated zinc with an organic coating equivalent to Class 3 coating. E-coat increases installation speed and decreases installation torque.



Petrochemical Coatings

	Icon/Coating	Standard	Coating Thickness	Corrosion Resistance	Description
HDG	 Hot Dip Galvanised	AS/NZS 1214	50µm	High	HDG products are used where a high level of corrosion resistance is required. HDG products are recommended for long term outdoor applications.
Z/P	 Zinc Plated (RoHS Compliant)	ISO 4042	5µm	Low	Product is electroplated with zinc which is then passivated with a transparent conversion layer. Z/P products are recommended for indoor and noncorrosive environments.
ZYP	 Zinc Yellow Passivate	ISO 4042	5µm	Low	Product is electroplated with zinc which is then passivated with a iridescent yellow conversion layer. ZYP products have a greater resistance to corrosion than Z/P and are recommended for low-corrosion environments or temporary fixing.
CAD	 Cadmium	ASTM B-766	12µm	Moderate	Cadmium provides excellent corrosion resistance and is suitable for high temperature and marine applications. It offers good lubricity for even tensioning and is a an exceptional bonding surface for paint and other adhesives,
MOLY	 1PX1 (Moly)	Proprietary Coating Specification	10µm	Moderate	1PX1 significantly reduces friction coefficient and ensures evenly tensioned fasteners. Provides excellent undercoat for epoxy paints and has good resistance to acids.
XYLAN	 Xylan Blue/ Green	Proprietary Coating Specification	25µm	High	Xylan Blue significantly reduces friction coefficient and ensures evenly tensioned fasteners. Provides excellent corrosion, chemical and weather resistance. Provides excellent undercoat for epoxy paints. Standard colours are Xylan Blue and Xylan Green.
PLN	 Plain (No Coating)	-	-	-	No additional coating applied. Products are supplied lightly oiled to inhibit rust in the packaging and assist with installation.