



General Purpose Nylon Glands for Unarmoured Cable

Features:

- For indoor or outdoor use
- Easy to assemble for use with unarmoured cables
- Provides superior seal on cable sheath and enclosure
- Halogen Free
- UV protected (black only)
- Seals available to suit 1.5, 2.5 & 4.0mm twin and earth TPS cable (ALCMG20 and ALCMG25 only)
- Comes complete with locknut

Material: Body & Cap - Polyamide PA6 (Nylon)


Seal & Washer - black chloroprene

Approvals: IP66/68 (5 bar)

Flammability: V2 to UL 94

Operating Temperature: Permanent -20°C to +100°C

Intermittent up to 150°C

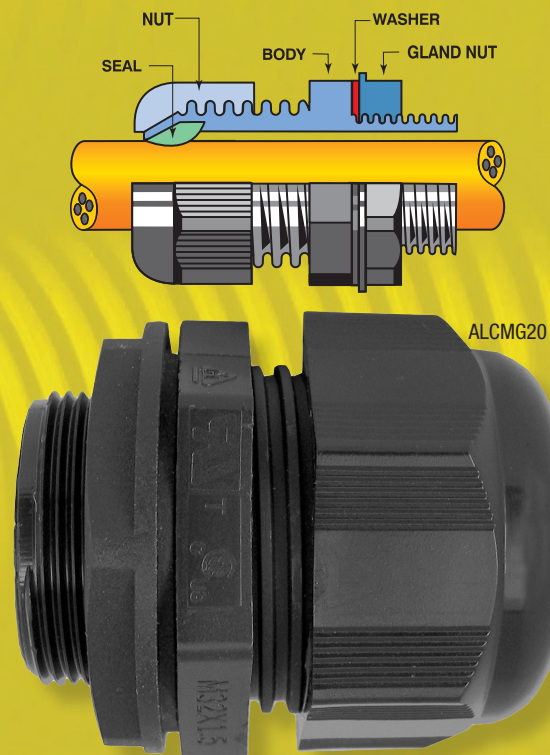

Cat. No.	Thread Diameter	Cable Range	Diameter Across Flats	Colour	Orange Shroud*		Box Qty
					PVC	Silicon	
ALCMG12	M12 x 8	3 - 6.5mm	15mm	Black	-	-	40
ALCMG16	M16 x 15	5 - 10mm	22mm	Black	ALCSG1	ALCSG1S	25
ALCMG20	M20 x 15	10 - 14mm	27mm	Black	ALCSG2	ALCSG2S	25
ALCMG25	M25 x 15	11 - 17mm	29mm	Black	ALCSG2L	ALCSG2LS	15
ALCMG32	M32 x 15	18 - 25mm	42mm	Black	-	ALCSG3L	5
ALCMG40	M40 x 18	22 - 32mm	53mm	Black	ALCSG5	ALCSG5S	4
ALCMG50	M50 x 18	30 - 38mm	60mm	Black	ALCSG5	ALCSG5S	2
ALCMG63	M63 x 18	38 - 47mm	65mm	Black	ALCSG6	ALCSG6S	2
ALCMG75	M75 x 25	48 - 55mm	80mm	Grey	-	ALCSG7S	5

*For Black Shroud add 'B' to part number: e.g. ALCSG3SB. Note: Mounting thread pitch 1.5mm unless otherwise specified.



Follow us In Instagram
@Alco.cableglands



Follow us In Instagram
@alco_cableglands



A U S T R A L I A &
N E W Z E A L A N D

www.wattmaster.com.au
www.kleintoolsnz.com